

ID/VP SERIES

LINEAR VELOCITY AND POSITION



Simultaneous velocity and position measurement

The **ID/VP Series** combines a self-generating tachometer and a precision potentiometer to give an output of both velocity and analog position. Standard position output is a voltage divider circuit. Outputs optionally available are the bridge circuit, 4-20 mA, 0-10 VDC, and ± 10 VDC. See **ID/PB**, **ID/P420** and **ID/P510** series data sheets for specifications.

SPECIFICATIONS

FOR ID/PB, ID/VP420 AND ID/VP510 SERIES SPECIFICATION, SEE ID/B, ID/P420, AND ID/P510 SERIES PAGES.

GENERAL

Positional Linearity (**ID/VPA Only**)

2", 3", 4" & 5" Ranges	$\pm 0.25\%$ Full Scale
10", 15", 20" & 25" Ranges	$\pm 0.15\%$ Full Scale
All other ranges	$\pm 0.10\%$ Full Scale
Repeatability ¹	$\pm 0.015\%$ Full Scale
Positional Resolution	Essentially Infinite
Construction	Aluminum Cover & Baseplate
Sensing Devices	Tacho-Generator (velocity) Precision Potentiometer (position)

Connector	MS3102A-14S-6P
Wire Rope	$\varnothing 0.16$ Stainless Steel
Wire Rope Tension	See Table 6
Wire Rope Inbound Acceleration	See Table 6
Weight	
Up to 50"	1.96 lb. (0.54 Kg)
60" & 80"	2.20 lb. (1.00 Kg)
Dimensional Information	See Supplemental Data ^[1] , Fig. 3
Options and Accessories	See Supplemental Data ^[1]

ENVIRONMENTAL

Thermal Coefficient of potentiometer	± 100 PPM/ $^{\circ}$ C max.
Operating temperature	-40 $^{\circ}$ C to +95 $^{\circ}$ C
Operating humidity	95% R.H. max. non-condensing
Vibration	15 G's 0.1 ms max.
Shock	50 G's 0.1 ms max.
Ingress Protection	IP-40 (NEMA 1)

FOOTNOTES TO SPECIFICATIONS

1. Supplemental Data section located at end of Standard Series pages.

ELECTRICAL (POSITION)

Input Impedance ("A" Circuit)	1000 Ω $\pm 10\%$
Excitation Voltage (Ve)	25 Volts Max. AC or DC
Output Voltage Change Over	
Full Range of Transducer	92% to 98% of Excitation Voltage


ELECTRICAL (VELOCITY)

Output	See Table 6
Linearity	$\pm 0.10\%$ F.S. with 10 VDC Max Output
Ripple	3% Max.
Output Impedance	350 Ω

TABLE 6

RANGE (inches)	VELOCITY OUTPUT		WIRE ROPE TENSION		WIRE ROPE ACCEL	WEIGHT	
	(mV/in/sec)	(mV/cm/sec)	(oz)	(N)	(G's)	(lb)	(Kg)
2, 10	200	78	34	9.5	33	1.20	0.54
3, 15, 30	136	53	24	6.7	30	1.20	0.54
4, 20, 40	102	40	24	6.7	36	1.20	0.54
5, 25, 50	82	32	34	9.5	33	1.20	0.54
60	69	27	24	6.7	27	1.54	0.70
80	52	20	19	5.3	16	1.54	0.70

CONNECTION DIAGRAM



MODEL NUMBER CONFIGURATION



BASIC CONFIGURATION (FOR ALL RANGES)

ID/VPA-50-S10-N1S-10C

E ELECTRICAL OUTPUT
POSITION ELECTRICAL OUTPUT

A.....Voltage Divider Circuit
B.....Bridge Circuit
420.....4 to 20 mA
510.....0 to 10 VDC

0 RANGE

2.....2" (50 mm)
3.....3" (75 mm)
4.....4" (100 mm)
5.....5" (125 mm)
10.....10" (250 mm)
15.....15" (390 mm)
20.....20" (500 mm)
25.....25" (640 mm)
30.....30" (750 mm)
40.....40" (1000 mm)
50.....50" (1250 mm)
60.....60" (1500 mm)
80.....80" (2000 mm)

1 WIRE ROPE

S..... $\varnothing 0.16$ (0,4 mm) Stainless Steel
N..... $\varnothing 0.18$ (0,45 mm) Nylon Jacketed Stainless Steel

2 WIRE ROPE TENSION

1.....Standard (50 G Units to 50")
2.....Reduced (See Table 7 for Value)
3.....Increased (100G Ranges to 50")*
*Not Available Ranges 2" to 5"

3 WIRE ROPE EXIT DIRECTION
USE NUMBER DESIGNATORS SHOWN

0=STANDARD EXIT

4 DUST WIPER OPTION

N.....No dust wiper
D.....Dust Wiper Included

5 POTENTIOMETER VALUE


VPB	0.....Required Designator
VP420	
VP510	
VPA	1.....1K Ω
	3.....5K Ω *
	4.....10K Ω *

*Not Available Ranges 2" to 5"
SEE SUPPLEMENTAL DATA FOR LINEARITY OPTION

6 ELECTRICAL OUTPUT POLARITY

S.....Standard (increasing output as wire rope is extended)
R.....Reversed (decreasing output as wire rope is extended)

7 CONNECTOR LOCATION
USE NUMBER DESIGNATORS SHOWN



1=STANDARD LOCATION
NOTE: Locations **2** and **5** are available on **VPA** Model only.

8 0.....Required Designator

9 ELECTRICAL INTERFACE

C.....Mating Connector Included
K.....Mating Connector Omitted*
T.....Terminal Strip

*Electrical cable with mating connector may be ordered separately as part number **10028-xM** where 'x' is the length required in meters.

ADDITIONAL OPTIONS

TABLE 7

STANDARD SERIES — WIRE ROPE TENSION AND ACCELERATION

RANGE	ID/PA, ID/PB, ID/P420, ID/P510				ID/EP SERIES				ID/V & ID/VP SERIES			
	STANDARD WIRE ROPE TENSION	STANDARD WIRE ROPE ACCEL	REDUCED WIRE ROPE TENSION	REDUCED WIRE ROPE ACCEL	STANDARD WIRE ROPE TENSION	STANDARD WIRE ROPE ACCEL	REDUCED WIRE ROPE TENSION	REDUCED WIRE ROPE ACCEL	STANDARD WIRE ROPE TENSION	STANDARD WIRE ROPE ACCEL	REDUCED WIRE ROPE TENSION	REDUCED WIRE ROPE ACCEL
(in) (mm)	(oz) (N)	(G's)	(oz) (N)	(G's)	(oz) (N)	(G's)	(oz) (N)	(G's)	(oz) (N)	(G's)	(oz) (N)	(G's)
2 50	34 9.5	>50	16 4.4	28	-	-	-	-	34 9.5	33	16 4.4	14
3 75	24 6.7	>50	14 3.9	16	-	-	-	-	24 6.7	30	14 3.9	15
4 100	24 6.7	>50	11 3.1	12	-	-	-	-	24 6.7	36	11 3.1	15
5 125	34 9.5	>50	8 2.2	7	-	-	-	-	34 9.5	33	8 2.2	6
10 250	34 9.5	>50	16 4.4	28	34 9.5	43	16 4.4	19	34 9.5	33	16 4.4	14
15 390	24 6.7	>50	14 3.9	16	-	-	-	-	24 6.7	30	14 3.9	15
20 500	24 6.7	>50	11 3.1	12	-	-	-	-	24 6.7	36	11 3.1	14
25 640	34 9.5	>50	8 2.2	7	34 9.5	37	8 2.2	7	34 9.5	33	8 2.2	6
30 750	24 6.7	>50	14 3.9	16	-	-	-	-	24 6.7	30	14 3.9	15
40 1000	24 6.7	>50	11 3.1	12	-	-	-	-	24 6.7	36	11 3.1	12
50 1250	34 9.5	>50	8 2.2	7	34 9.5	37	8 2.2	7	34 9.5	33	8 2.2	5
60 1500	24 6.7	27	7 1.8	2	24 6.7	18	7 1.8	5	24 6.7	27	7 1.8	6
80 2000	19 5.3	16	5 1.4	2	19 5.3	7	5 1.4	2	19 5.3	16	5 1.4	3

LIFE

Ranges 2" to 5" 5,000,000 full stroke cycles
 Ranges 10" to 25" 500,000 full stroke cycles
 Ranges 30" to 80" 250,000 full stroke cycles

*With 1K ohm potentiometer, wire rope misalignment 2° maximum at full stroke, relatively dust free environment, and with nylon jacketed wire rope

OPTION DESCRIPTIONS


OPTION	OPTION DESIGNATOR	DESCRIPTION						
Nylon jacketed wire rope	N	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. Increases wire rope life dramatically but may increase non-linearity by as much as ±0.05% of full scale.						
Reduced Wire Rope Tension	2	Reduces the overall tension in the wire rope and increases wire rope life. Dynamic response of the transducer is reduced due to the reduced inbound acceleration capability.						
Increased Wire Rope Tension	3	Increases tension in the wire rope which increases the dynamic response of the transducer. On selected units with range of 50" (1250 mm) or less, inbound acceleration capability is 100G's. Wire rope life may be adversely affected by the high tension option.						
Dust wiper	D	Lubricated wiper strips dust and debris from wire rope as it retracts into case. Adds 0.36" (9 mm) height to wire rope exit location.						
Non-standard potentiometer (applies to ID/PA series only)	3,4	Non-standard potentiometer linearity is as follows: <table border="1" style="margin: 5px auto;"> <thead> <tr> <th>RANGE</th> <th>LINEARITY</th> </tr> </thead> <tbody> <tr> <td>10" to 25"</td> <td>±0.50% of full scale</td> </tr> <tr> <td>30" and above</td> <td>±0.25% of full scale</td> </tr> </tbody> </table> Note: This option is subject to potentiometer availability.	RANGE	LINEARITY	10" to 25"	±0.50% of full scale	30" and above	±0.25% of full scale
RANGE	LINEARITY							
10" to 25"	±0.50% of full scale							
30" and above	±0.25% of full scale							
Reversed output	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity or encoder signal.						
Terminal strip	T	Replaces connector with a terminal strip.						

10067 – AUXILIARY WIRE ROPE EXTENSION KIT

The auxiliary wire rope extension may be used to facilitate mounting the transducer remotely from the measurement point. The clip on the extension attaches to the eye fitting on the transducer. The eye fitting on the opposite end, which is identical to the fitting on the transducer, mounts to the moving element. The extension kit is also available with the clip end unterminated for situations where it is more convenient to size the wire rope length during installation. Clip and crimp fitting are included with the unterminated version.

10067- 1 -CM- 2

- 1 DIMENSION "L"**
Specify Dimension "L" in centimeters to the nearest whole centimeter
NOTES: 1. 1 cm = 0.394", 1 inch = 2.54 cm
 2. Shortest length "L" is 5 cm (approximately 2")
- 2 UNTERMINATED CLIP END**
 Leave Blank.... Completed kit (No designator required)
 U Unterminated Clip End
 (clip and crimp sleeve included in kit)

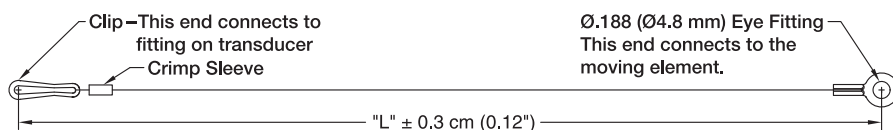

REPLACEMENT WIRE ROPE KITS


The replacement Wire Rope Kit includes a new wire rope with all end terminations, wire rope guide, felt dust wiper where applicable and installation instructions. To order, replace 'xx' in the part number with the applicable measurement range in inches.

- 10107-xx Replacement Wire Rope Kit**—Standard Ø.016" Stainless Steel Wire Rope.
- 10108-xx Replacement Wire Rope Kit**—Ø.018" Nylon Jacketed Stainless Steel Wire Rope.
- 10127-xx Replacement Wire Rope Kit**—Standard Ø.016" Stainless Steel Wire Rope with Dust Wiper.
- 10128-xx Replacement Wire Rope Kit**—Ø.018" Nylon Jacketed Stainless Steel Wire Rope with Dust Wiper.

DIMENSIONAL INFORMATION

ID/VP SERIES (VELOCITY/POSITION) — ALL MEASUREMENT RANGES

FIG. 3

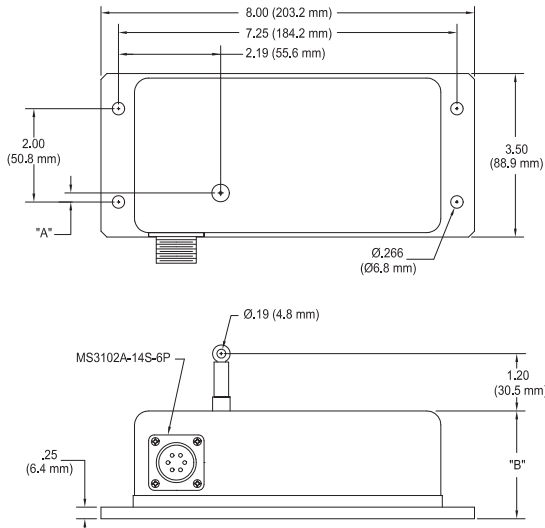

ID/VP SERIES				
RANGE	DIM "A"		DIM "B"	
	(inch)	(mm)	(inch)	(mm)
2", 10"	0.66	16.8	2.25	57.0
3", 15", 30"	0.51	12.9	2.25	57.0
4", 20", 40"	0.35	8.8	2.25	57.0
5", 25", 50"	0.19	4.8	2.25	57.0
60"	0.04	1.0	3.25	82.6
80"	-0.28	-7.1	3.25	82.6

Dimensions in brackets are millimeters