



1-830

Axial Displacement Transmitter



Applications

- Turbine / Generator Sets
- Fans or Blowers
- Motors
- Gear Boxes
- Bearing Caps

Features

- 4-20 mA output proportional to targets axial position
- Compatible with major probe types
- DIN Rail mountable
- Probe failure detect modes
- BNC buffered output and Gap voltage

Description

The 1-830 series axial displacement transmitters continue the successful line of vibration transmitters designed and manufactured by CEC. These single channel signal conditioners interface with proximity transducers like the 3300, 3300XL and 7200 series or probe types with similar specifications.

Each unit provides a calibrated 4-20 mA output that is proportional to the targets axial position as sensed by the transducer and extension system. The probe Gap and buffered dynamic signal are easily accessed via the front panel BNC.

Probe failure conditions are quickly identified via the multicolored status LED and the 4-20 mA output. This unique feature allows for instant feedback of the probe system condition during installation or machine operation.



1-830 Axial Displacement Transmitter

Performance Specifications

Input:	Ref. 3300, 3300XL, 7200 series or equivalent
Operating Linear Range:	0 to 16 VDC corresponding to a gap of 25 to 80 mils.
Outputs:	
Current	4-20 mA proportional to displacement where 4mA = 25 mils & 20mA = 80 mils, voltage reversal and short circuit protected terminal connection.
Buffered Signal (GAPV)	Buffered sensor signal, short circuit protected, BNC connector
Isolation:	500 VDC case to circuit
Power Supply:	18 - 32 VDC @ 250 mA
Maximum Load Resistance:	1K ohms
Range:	50 mils, (± 25 mils from 50 mil offset)
Sensitivity:	
Scale	-200 mV/mil
Accuracy	$\pm 5\%$ at 77°F
Temperature Coefficient	$\pm 3.5\%$ per 100°F temperature increase from 77°F
Linearity	± 1 mil of best fit straight line
Target Material:	4140 stainless steel or Incoloy 901 (see Table 1)
Probe Failure Detect:	
Probe to close to target	Output goes below 2.5 mA if the gap is less than 25 mils
Probe not connected or too far from target	Output goes below 20.5 mA if gap is greater than 80 mils
Operating Temperature:	-40°F to +150°F
Relative Humidity:	To 95% non-condensing
Dimensions:	See Figure 1
Weight:	10 ounces
Mounting:	35 mm DIN rail
Case Material/shielding:	PVC with interior zinc overspray
Terminals:	Tension Loaded Contacts
BNC Connector:	Cover Provided

Hazardous Approvals



North America
 CSA C/US Class I, Division 2, Groups A, B, C and D
 Temp Code T3C; Amb. Temp -40°C to 65°C



European
 ATEX II 3 G Ex nA II T3

Ordering Information

When ordering, use table 1 to develop part number. In keeping with CEC's policy of continuing product improvement, specifications may be changed without notice.


Table 1

CEC P/N 1-830- A A A			
A	INPUT TYPE (Plain or Bezel Tip)		
	Probe Type	Target Material	System Length
	A15 = 3300	Incoloy	5in
	A16 = 3300	Incoloy	6in
	A14 = 3300	Incoloy	1-0in
	B15 = 3300	4140 S.S.	5in
	B16 = 3300	4140 S.S.	6in
	B14 = 3300	4140 S.S.	1-0in
	C15 = 7200	Incoloy	5in
	C16 = 7200	Incoloy	6in
	C14 = 7200	Incoloy	1-0in
	D15 = 7200	4140 S.S.	5in
	D16 = 7200	4140 S.S.	6in
	D14 = 7200	4140 S.S.	1-0in

© 2005 CEC Vibration Products Inc. All rights reserved.

Revised April 2005

Figure 1

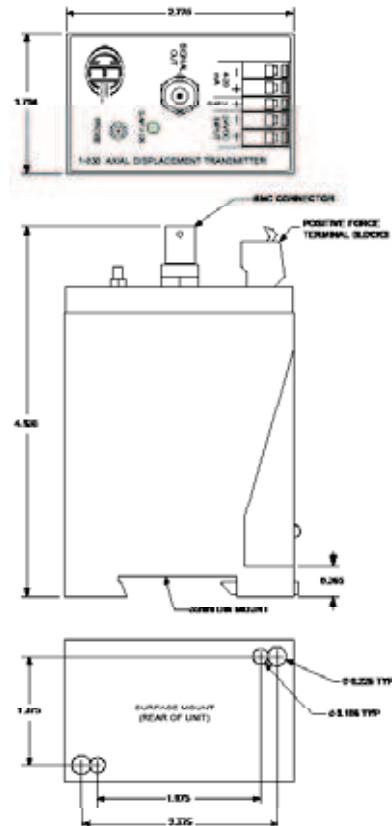

CEC Vibration Products • 746 Arrow Grand Circle • Covina, California 91722 • USA
 (626) 938-0200 • (800) 468-1345 • Fax: (626) 938-0202 www.cecvp.com



www.instrumentation.it

INSTRUMENTATION DEVICES SRL

Via Acquanera 29, 22100 COMO (Italy) tel. +39.031.525391 - fax +39.031.507984 - info@instrumentation.it